


ANYAPPS-CONTAINER HOUSE-FLAT CABLE

Two Cores or Three Cores Flat PVC Cable

Comply with SAA/UL/CSA/CE/BS standard



应用

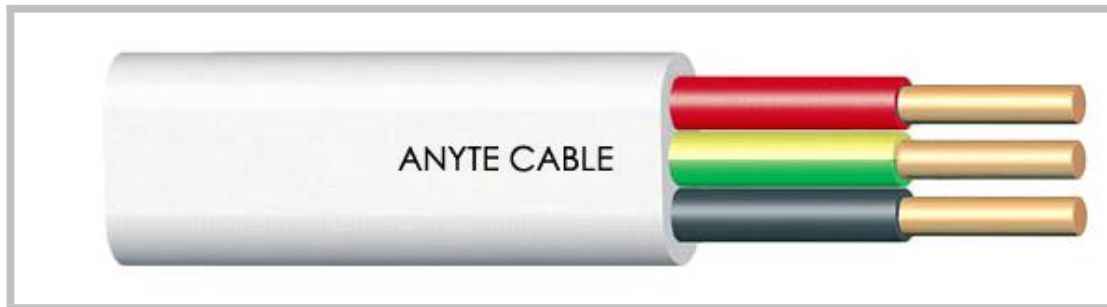

APPLICATION

Applies to home, commercial and industrial area, directly burial or in underground pipeline, protect the conductor and PVC . Particularly suitable for

the construction and exported to Australia, USA, Europe and other movable house, containers, refrigerated containers and house cars and other internal installation.

结构

Seven piece copper wire bundles or single bare copper conductor meets the standards of the multinational

Special PVC up to 105 ° C, minimum temperature -40 ° C optional cores insulation

Special PVC up to 105 ° C, minimum temperature of -40 ° C outer sheath, flat type

Using a standard thickness, easy stripping and cutting

With alkali, oil, moisture, mold, environmental protection and other features

Flat sheathed cable to meet the multi-national standard, flexible enhanced, more convenient to install

SAA / UL / CSA/ CE / BS standard, so that the cable can be used in Australia, USA and Europe and other markets at the same time



PROPERTY

Working voltage: 300/500V, 450/750V

Operating temperature range:

Movable Installation: - 5 ° C to +105 ° C, fixed installation: -40 ° C to +105 ° C

More details parameters of the standard of this section please refer to following page:

SAA Standard: Page 135

UL / CSA Standard: Page 83, 96

CE Standard: Page 128, 129

Standard BS: Page 148

✂ Can produce special cables as customer's request