

ANYCERT-UL719Multi cores Nylon Cable

NM-B NMD90




应用

- It is usually used in residential buildings as a shunt for sockets, switches and other loads. In addition to meeting the AWM (Equipment Wiring Material) specifications, this product also meets UL (MTW) certification. MTW (Machine Tool Wire) certification makes it fully applicable to the machine tool industry (not only equipment). At the same time comply with UL 83, UL719 standards.
- The performance is much better suitable for building wires, nylon insulation, bright appearance, excellent thermal stability, mechanical strength, cold resistance, chemical resistance, oil resistance.
- The cable UL (MTW) machine-tool-wire-CSA and other approvals comply with US and Canadian standards, enabling the cable to be used simultaneously in the North American market

结构

- Single or multiple stranded of 14-2 / 0AWG bare copper wire in accordance with ASTM-B3 / B8
- Core wire PVC insulation, transparent nylon coating
- insulation outer layer
- Conform to ASTM-B3 / B8 standard ground wire
- outsourcing special isolation paper arranged in the middle of insulated wire. The core wires are arranged in parallel with each other or twisted into a circle
- Special heat-resistant thermoplastic sheath .
- Working voltage: 600V
- Operating temperature range: 90 °C dry

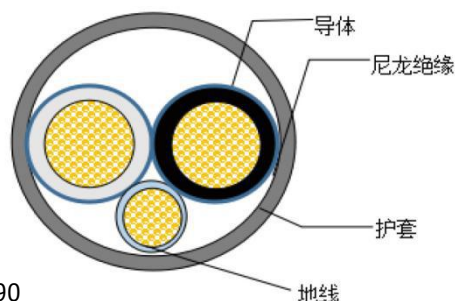

NM-B NMD90

| Item | core | conductor | | | Earth | Ins. | jacket | | Jacket | Ref. | Weight |
|---------------------|------|-----------|----------|------|--------|------|--------|------|--------|------|--------|
| | | size | wires | O.D. | | | O.D. | O.D. | | | |
| | No | AWG | No./mm | mm | mm | mm | mm | mm | mm | mm | Kg/km |
| 1001NMBR2 1003014A | 2 | 14 | 1/1.63 | 1.63 | 1/1.63 | 1.63 | 2.43 | 2.67 | 6.9 | 7.7 | 95.7 |
| 1001NMBR2 1003012A | | 12 | 1/2.05 | 2.05 | 1/2.05 | 2.05 | 2.85 | 3.09 | 7.8 | 8.5 | 136.3 |
| 1001NMBR2 10030102A | | 10 | 1/2.59 | 2.59 | 1/2.59 | 2.59 | 3.65 | 3.89 | 9.4 | 10.1 | 206.6 |
| 1001NMBR2 7003008A | | 8 | 7/1.23 | 3.69 | 1/2.59 | 2.59 | 5.25 | 5.55 | 12.7 | 13.4 | 310.1 |
| 1001NMBR2 19003008C | | 8 | 19/0.75 | 3.75 | 1/2.59 | 2.59 | 5.31 | 5.61 | 12.8 | 13.6 | 310.2 |
| 1001NMBR2 7003006A | | 6 | 7/1.56 | 4.68 | 1/2.59 | 2.59 | 6.24 | 6.54 | 14.7 | 15.4 | 428.0 |
| 1001NMBR2 19003006C | | 6 | 19/0.954 | 4.77 | 1/2.59 | 2.59 | 6.33 | 6.63 | 14.8 | 15.6 | 429.6 |